

HD PRO SERIES

Series dedicated to the installer who's looking for a high-level camera making the difference in terms of image quality.



DI-320A-28

20M IR 1080P PRO HD ANALOG FIXED LENS TURRET DOME CAMERA

Equipped with a 2.8mm fixed lens, this 2MP Turret Dome camera is designed for short distance surveillance systems (up to 20m) for both indoor and outdoor scenarios.

Featuring 4in1 technology selectable by a protected DIPswitch the camera is ideal for Plug & Play over existing analog infrastructure.



MAIN FEATURES



- 2MP
- Pro Series
- 1920x1080 Resolution
- 2.8mm (88°)
- 3D-DNR
- 4 in 1 (DIP Switch AHD/TVI/CVI/CVBS + PAL/NTSC)
- IP67
- COC support



SPECIFICATIONS

| | |
|------------------------|--|
| Image Sensor | 1/2.9" 2MP Sensor |
| Image Format | 16:9 |
| Effective Pixels | 1936x1096 |
| Scanning System | Progressive |
| Resolution | 2MP: 1920x1080 AHD/TVI/CVI 1MP: 1280x720 AHD/TVI/CVI CVBS: 700TVL |
| FPS | 25/30FPS |
| Min. Illumination | Color: 0.005lux @F1.2, AGC ON B/W: 0lux with IR" |
| D&N | True Day&Night-ICR |
| IR LED | 1 LED Array (20m) |
| OSD Menu | Available via CoC Only |
| CoC Support | Yes |
| Day & Night Mode | Ext/Auto/Day/Night |
| Backlight Compensation | No |
| S/N Ratio | ≥52dB (AGC OFF) |
| White Balance | Auto / Manual |
| Noise Reduction | 3D-DNR |
| Video Output | 2MP / 1MP (Selected by OSD Menu) AHD/TVI/CVI/CVBS + PAL/NTSC (Selected by DIP Switch) |
| Privacy Mask | No |
| D-Effect | No |
| WDR | No |
| Lens (Field Of View) | 2.8mm Mega-Pixel Fixed (88°) |
| Power | DC12V/270mA |
| Operation Temperature | -30°C ~ 50°C, 10% ~ 90% humidity |
| Protection Rate | IP67 |
| Dimensions | Φ97*82.6mm |
| Net Weight | 485g |
| Junction Box | PR-JB12IP66 - PR-JB12IP64 - PR-WB-A |

DIMENSIONS

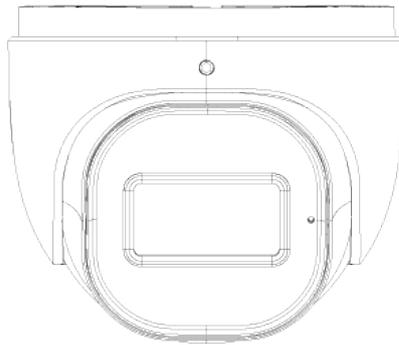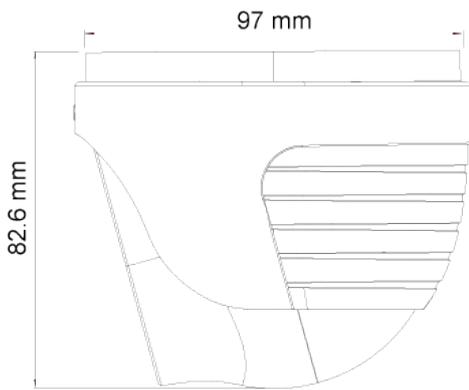

DIP Switch for Output Selection

ACCESSORIES



PR-JB12IP66
Small Water-proof Junction Box



PR-JB12IP64
Small Junction Box



PR-WB-A
Designed Wall Bracket